# VOSCOM

### Fiber Optic Video & Audio & Data Transmission 8-Channel Video + 8 Duplex Audio + 4 Duplex Data over Fiber



#### System Design

Fiber Optic Video & Audio & Data Transmitter / Receiver VOS-8840FDDT/R provides for the digital transmission of 8-Channel Composite Video and 8 Duplex audio and 4 duplex data. Data support RS485, RS232, RS422 protocols. Ideal for Broadcast /Studio, CCTV audio and Professional AV applications.



Stand-alone or rack-mount. All units of VOS-8840FDDT/R come in an insert card version. The cards can be inserted into our 14-slot,19inch 4U rack-mountable card cage (VOS-CH04). This model card require two slots widths.



Single-Mode or Multi-Mode, VOS-8840FDDT/R can support FC /PC or ST/PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget.






#### Ethernet

#### **Features**

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- 24-Bit Digitally Encoded Audio over one Fiber
- Data support RS485(2-wire or 4-wire), RS232, RS422, Contact Closure
- Compatible with all PAL, NTSC, SECAM Video Systems
- Multi-mode Fiber Support for Distances up to 1.2 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Support Coarse Wavelength Division Multiplexing (CWDM)
- Stand alone or rack-mount
- Produce according to customer's specifications, providing OEM

#### Typical Configuration

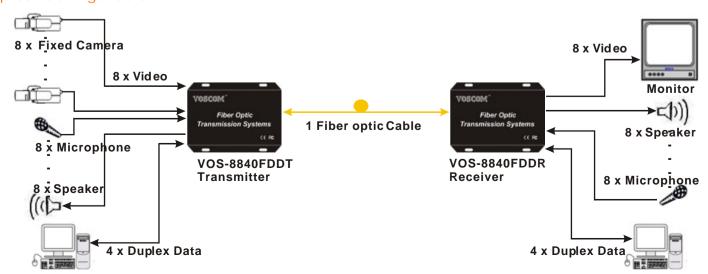

## Video & Audio & Data over Fiber

#### Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power	Maximum Transmission
Transmitter	Receiver	Tibel Mode	wavelengths	Budget	Distance
VOS-8840FDDMT	VOS-8840FDDMR	Multi-Mode	1310nm/1550nm	12dB	1.2km
VOS-8840FDDST	VOS-8840FDDSR	Single-Mode	1310nm/1550nm	12dB	20km

#### Note:

- The Optical Power Budget data fit Mulit-mode (62.5/125 μm), Single-Mode (9/125 μm).
- When using  $50/125~\mu m$  multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.

Bit Error Rate: 10E-9

- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

#### Specification

• Video		• Connectors	
Input/output impedance: Input/output Compatibility: Input/output voltage: Bandwidth: Bit Resolution: Differential Gain: Differential Phase:	atibility: PAL, NTSC, SECAM  voltage: 1.0 Volt p-p  ndwidth: 6.5MHZ  solution: 8-Bit Digital Transmission  ial Gain: < 1.5%  al Phase: < 1.5°  Tilt: < 5%	Audio: Data: Optical:	RJ-45 RJ-45 FC (standard), ST Optional Screw terminal block
		Electrical & Mechanical	
Tilt: Signal-to-Noise Ratio(SNR):		Input Power Requirements:  Power Adapter:	DC 5V@3A AC 100V~240V
• Audio		Power Consumption:	
Number of Channels: 8-Channel Duplex Audio Audio input/output Level: 6 dBm Audio in/output impedance: 600Ω Balanced/Unbalance Bandwidth: 10Hz ~ 20KHz Bit Resolution: 24-Bit Signal-to-Noise Ratio(SNR): > 80 dB	6 dBm 600Ω Balanced/Unbalanced	Card for 4U Rack Dimensions:	
		• Environmental	
	Operating Temperature: Storage Temperature:		
• Data		=	0%~95% (non-condensing) >100,000 hours
	RS485(2-wire or 4-wire), RS232/422,Contact Closure DC to 115.2Kbps		