

### Fiber Optic Video Transmission for Fixed Cameras 48-Channel Composite Video over Fiber

48 →  
Video

#### System Design

Fiber Optic Video Transmitter & Receiver VOS-48000FT/R can transmission 48-Channel digital composite video over one fiber, Support Coarse Wavelength Division Multiplexing (CWDM) designed for *Fixed Cameras*.



Audio

Only support Stand-alone 19 inch 2U Rack. All units of VOS-48000FT/R can not be used by video card style.

Data

Only support Single-Mode. VOS-48000FT/R can support FC/PC or ST/PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget. Manufacturer's standard is: Single-mode 20km.




Ethernet

#### Features

- Support Point-to-Point or Daisy-Chain connection
- Uncompressed Digital Composite Video over one fiber
- Compatible with all PAL, NTSC, SECAM Video Systems
- Single-Mode Fiber Support for Distances up to 20 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Support Coarse Wavelength Division Multiplexing (CWDM)
- Stand alone 19inch 2U Rack
- Produce according to customer's specifications, providing OEM

#### Typical Configuration

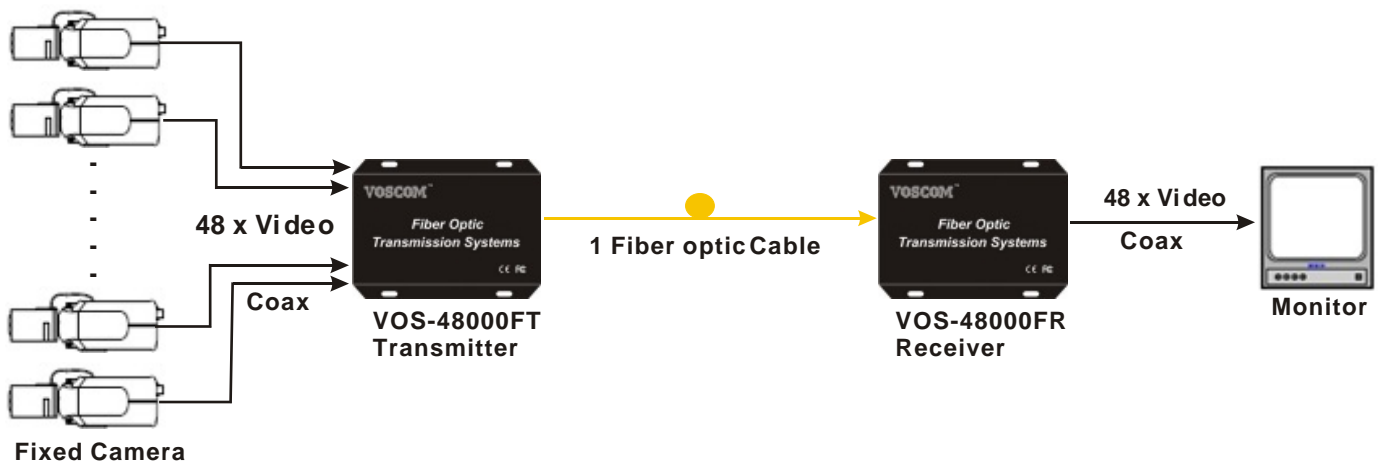

# Composite Video over Fiber

## Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VOS-48000FST	VOS-48000FSR	Single-Mode	1430nm ~ 1550nm	10dB	20km

### Note:

- The Optical Power Budget data fit Single-Mode(9/125  $\mu$ m).
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

## Specification

<ul style="list-style-type: none"> <li>• Video</li> </ul>	<ul style="list-style-type: none"> <li>• Connectors</li> </ul>
Number of Channels: 48-Channel Video Input/output impedance: BNC 75 $\Omega$ Input/output Compatibility: PAL, NTSC, SECAM Input/output voltage: 1.0 Volt p-p Bandwidth: 6.5MHZ Bit Resolution: 8-Bit Digital Transmission Differential Gain: < 1.5% Differential Phase: < 1.5° Tilt: < 5% Signal-to-Noise Ratio(SNR): > 67 dB	Video: 75 $\Omega$ BNC (Gold Center Pin) Optical: FC (standard), ST Optional Stand-Alone Power: Screw terminal block Rack Power: AC line cord
	<ul style="list-style-type: none"> <li>• Electrical &amp; Mechanical</li> </ul>
	Input Power Requirements: DC 5V@6A Power Adapter: AC 100V~240V (Built-in) Power Consumption: < 20W Stand-Alone Dimensions: 483mm × 250mm × 89mm Shipping Weight: 12kg (include TX & RX)
	<ul style="list-style-type: none"> <li>• Environmental</li> </ul>
	Operating Temperature: -45° C~+75° C Storage Temperature: -45° C~+85° C Relative Humidity: 0%~95% (non-condensing) MTBF: >100,000 hours

Due to continuous improvement, all products specifications are subject to change without further notice.  
 Contact us for custom requirements. E-mail: [Sales@voscom.com](mailto:Sales@voscom.com) Website: [www.voscom.com](http://www.voscom.com)