

Fiber Optic Contact Closure Transmission 4-Channel Duplex Contact Closure over Fiber


System Design

Fiber Optic Contact Closure Transmitter & Receiver



VOS-4FOM-DCCT/R provides for the digital transmission of 4-Channel Duplex dry contact closure input signal over one fiber.

Applications for Alarm Event Triggering, Building Automation and Environmental Control Systems, Fire & Alarm Systems, Gate control, PIR signal Transmission, Traffic Signal Control Equipment, etc.

Stand-alone or rack-mount. All units of VOS-4FOM-DCCT/R come in an insert card version. The cards can be inserted into our 16-slot, 19inch 4U rack-mountable card cage (VOS-CH04).

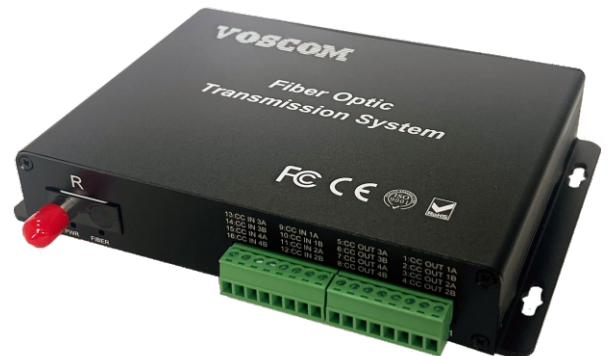


Panel

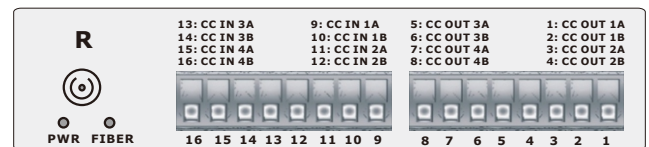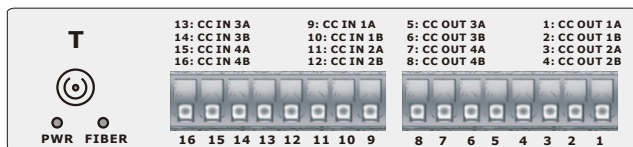

Features

- Dry Contact Closure over one fiber
- By default, the dry contact closure status is normally open.
- Multi-mode Fiber Support for Distances up to 500m
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Stand alone or rack-mount

Typical Configuration

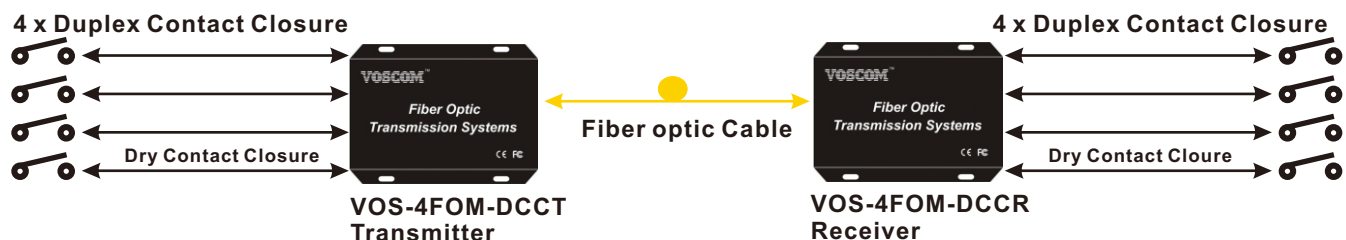

Contact Closure over Fiber

Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VOS-4FOM-DCCMT	VOS-4FOM-DCCMR	Multi-Mode	1310nm/1550nm	16dB	500m
VOS-4FOM-DCCST	VOS-4FOM-DCCSR	Single-Mode	1310nm/1550nm	12dB	20km
VOS-4FOM-DCCST-4	VOS-4FOM-DCCSR-4	Single-Mode	1310nm/1550nm	18dB	40km
VOS-4FOM-DCCST-6	VOS-4FOM-DCCSR-6	Single-Mode	1310nm/1550nm	25dB	60km

Note:

- The Optical Power Budget data fit Multit-mode(62.5/125 μ m),Single-Mode(9/125 μ m.).
- When using 50/125 μ m. multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables.Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

Specification

• Contact Closure

Number of Channels: 4-Channel Duplex CC
Data Formats: Dry Contact Closure
Status: Normally Open (Default)
Response Time: 2 ms
Relay/Contact Rating: 0.5 A @ 120VAC
0.25 A @ 240VAC
1A@30VDC
5A@6VDC
Max output power: 30W

* **Note:** the contact closure can also support Normally Closed status, but this must be configured by the factory, so please choose the configuration prior to placing the order.

• Connector

Contact Closure: Terminal Block
Optical: FC/PC or ST/PC Optional
Stand-Alone Power: Screw terminal block
Rack Power: AC line cord

• Electrical & Mechanical

Input Power Requirements: DC 5V@2A
Power Adapter: AC 100V~240V
Power Consumption: < 3W
Stand-Alone Dimensions: 114mm x 167mm x 28mm
Shipping Weight: 1.2kg (include TX & RX)

• Environmental

Operating Temperature: -45°C~+75°C
Storage Temperature: -45°C~+85°C
Relative Humidity: 0%~95% (non-condensing)
MTBF: >100,000 hours