

Fiber Optic Serial Data Transmission 4-Channel Duplex Rs422 Serial Data over Fiber

System Design

Fiber Optic Serial Data Transmitter & Receiver

VOS-4FOM-D422T/R provides for the digital transmission of 4-Channel duplex Rs422 serial data signal over one fiber. Applications for PTZ Control for CCTV Surveillance Systems, Access Control System, Industirlia control, Data Control for Manufacturing / Assembly Platforms, ITS...etc.

Stand-alone or rack-mount. All units of VOS-4FOM-D422T/R come in an insert card version. The cards can be inserted into our our 14-slot, 19inch 4U or 6U rack-mountable card cage (VOS-CH04 or VOS-CH06). The card version of this model require **two slots widths**.


Single-Mode or Multi-Mode, VOS-4FOM-D422T/R can support FC /PC or ST/PC Optical connector, can be used in Daisy-Chain system (Need to customize). The Transmission distance range according to the Optical Budget. Manufacturer's standard is: Single-mode 20km or Multi-mode 2km.

Features

- Support Point-to-Point or Daisy-Chain connection
- Rs232 Serial data over one fiber
- Multi-mode Fiber Support for Distances up to 2.0 km
- Single-Mode Fiber Support for Distances up to 100 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Stand alone or rack-mount
- Produce according to customer's specifications, providing OEM



Typical Configuration

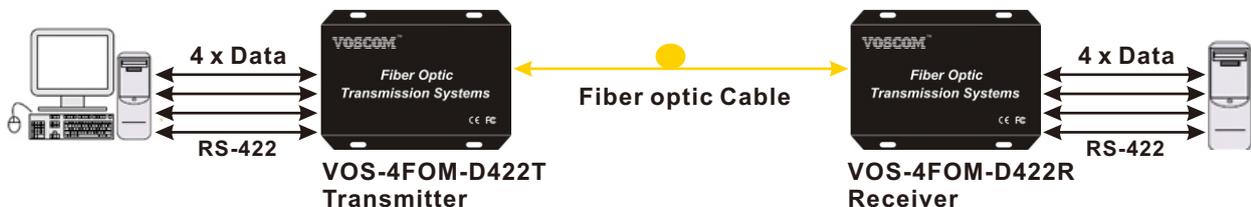

Serial Data over Fiber

Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VOS-4FOM-D422MT	VOS-4FOM-D422MR	Multi-Mode	1310nm	16dB	2km
VOS-4FOM-D422ST	VOS-4FOM-D422SR	Single-Mode	1310nm	12dB	20km
VOS-4FOM-D422ST-4	VOS-4FOM-D422SR-4	Single-Mode	1310nm	18dB	40km
VOS-4FOM-D422ST-6	VOS-4FOM-D422SR-6	Single-Mode	1550nm	25dB	60km

Note:

- The Optical Power Budget data fit Multi-mode(62.5/125 μm), Single-Mode(9/125 μM.).
- When using 50/125 μM. multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

Specification

• Serial Data	• Connectors
Number of Channels: 4-Channel Duplex Rs422 Serial Data Data Formats: Rs422 Data Data Rate: DC to 1Mbps Bit Error Rate: < 10E-9	Serial Data: Terminal Block Optical: FC/PC or ST/PC Optional Stand-Alone Power: Screw terminal block Rack Power: AC line cord
	• Electrical & Mechanical
	Input Power Requirements: DC 5V@2A Power Adapter: AC 100V~240V Power Consumption: < 5W Stand-Alone Dimensions: 192mm x 167mm x 28mm Shipping Weight: 2.0kg (include TX & RX)
	• Environmental
	Operating Temperature: -45°C~+75°C Storage Temperature: -45°C~+85°C Relative Humidity: 0%~95% (non-condensing) MTBF: >100,000 hours