

12G-SDI Fiber Optic Extender, Mini Type 4K UHD 1-Channel 12G-SDI, 6G-SDI, 3G-SDI

1 →
12G-SDI

Audio

Data


Ethernet

VOSCOM Mini 12G-SDI Fiber Converter support 1-Channel uncompressed 12G-SDI over one core fiber, also support 6G-SDI, 3G-SDI and HD-SDI. Integrated design combining video processing and optic-electric conversion, with high level of integration and small size, offer unmatched flexibility and cost efficiency. 12G-SDI over one single-mode fiber, the distance up to 10km.

Features

- Support SMPTE 2082 / 2081 / 424M / 292M / 259M or DVB-ASI compliant
- Automatic detection and re-clocking of 12G, 6G, 3G, 1.5G, 270M SDI data rates
- Supports embedded digital audio stream
- Coax inputs are equalized(EQ), Coax outputs are with driving function (CD)
- Support Single-mode fiber up to 10km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Plug and Play

Typical Configuration

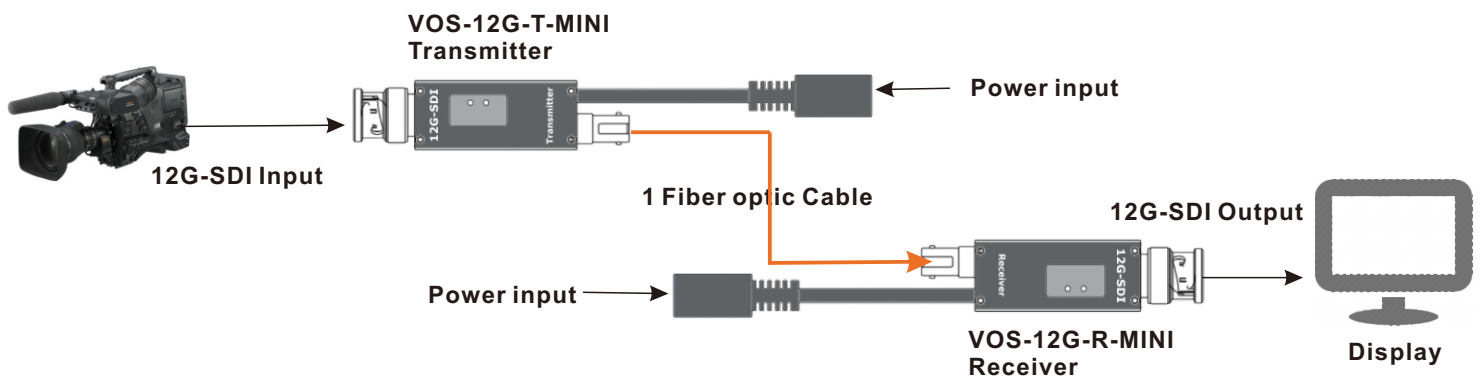

12G-SDI Fiber Optic Extender

Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VOS-12G-T-MINI	VOS-12G-R-MINI	Single-Mode	1470nm	12dB	10km

Note:

- The Optical Power Budget data fit Multimode(62.5/125 μ m), Single-Mode(9/125 μ m).
- When using 50/125 μ m multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

Specification

• Video

Number of Channels: 1-Channel 12G-SDI

Data Rate: 270 Mbps, 1.483 Gbps, 1.485 Gbps, 2.967 Gbps, 2.970 Gbps, 5.934 Gbps, 5.940 Gbps, 11.868 Gbps, 11.880 Gbps - Auto Select

Standards: SMPTE 2082(12G-SDI), SMPTE 2081(6G-SDI), SMPTE 424M (3G-SDI)
SMPTE 292M (HD-SDI), SMPTE 259M (SD-SDI)

Max Resolution: 4K UHD 2160 @ 60Hz

• Optical

Optical Connector: ST Optical connector
Fiber Type: Single-Mode, Single-Fiber
Rate: 12Gbps
Tx Output Power: 0~-3dB
Receiver Sensitivity: -12dB

• Electrical & Mechanical

Input Power Requirements: DC 5V
Power Adapter: AC100V~240V
Power Consumption: <1.5W
Stand-Alone Dimensions: 72mm x 18mm x 18mm
Shipping Weight: 0.5kg (include TX & RX)

• Connectors

Video Connector: 75 Ohm BNC (Gold Center Pin)
IEC169-8 standard
Optical Connector: ST Optical connector
Power Connector: DC 3.5 x 1.35mm

• Environmental

Operating Temperature: -20°C ~+70°C
Storage Temperature: -40°C~+85°C
Relative Humidity: 0%~95% (non-condensing)
MTBF: >100,000 hours