

3G-SDI Fiber Optic Extender 16-Channel 3G-SDI /HD-SDI over Fiber

16 →


3G-SDI

System Design

VOS-16H3G-T/R provides 16-Channel uncompressed 3G-SDI, HD-SDI or SD-SDI 1080p video over fiber and support one loop output for local display, dual outputs for two displays in the remote end.




Panel

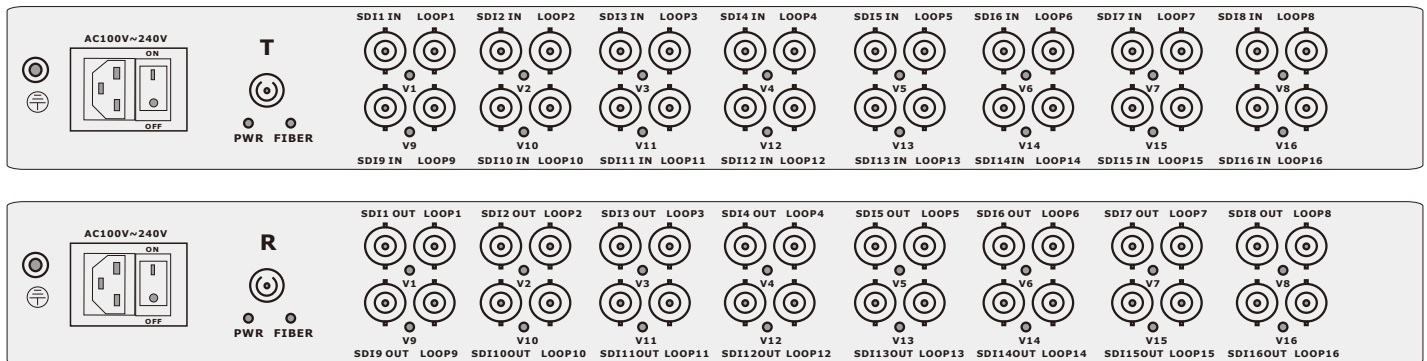

Features

- Multi-channel 3G-SDI transmission over one core fiber with CWDM
- Support SMPTE 424M / 292M / 259M or DVB-ASI compliant
- Automatic detection and re-clocking of 3G, 1.5G, 270M SDI data rates
- Supports embedded digital audio stream
- Coax inputs are equalized (EQ), Coax outputs are with driving function (CD)
- Standard SFP Module with LC connector support Single-mode 20km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- 19inch 1U rack-mount

Typical Configuration

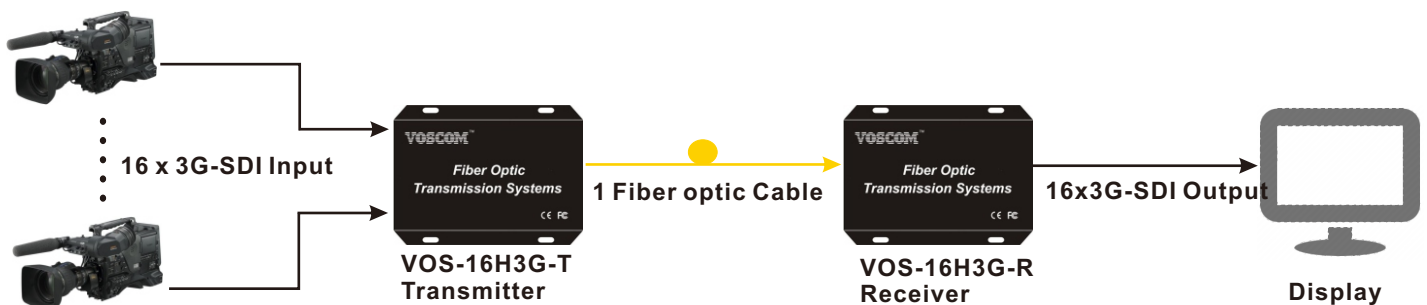

3G-SDI Fiber Optic Extenders

Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VOS-16H3G-T	VOS-16H3G-R	Single-Mode	1310~1610nm	12dB	20km

Note:

- The Optical Power Budget data fit Multit-mode(62.5/125 μ m), Single-Mode(9/125 μ m).
- When using 50/125 μ m multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

Specification

• Video

Number of Channels: 16-Channel 3G-SDI

Data Rate: 270 Mbps, 1.483 Gbps, 1.485 Gbps, 2.967 Gbps, 2.970 Gbps, - Auto Select

Standards: SMPTE 424M (3G-SDI), SMPTE 292M (HD-SDI), SMPTE 259M (SD-SDI)

Max Resolution: 1080p @ 60Hz

• Optical

Optical Connector: ST, FC or LC optional
Wavelengths: 1310nm~1610nm
Fiber Type: Single-Mode, Single-Fiber
Rate: 3Gbps
Tx Output Power: >-6dB
Receiver Sensitivity: >-14dB

• Electrical & Mechanical

Power Adapter: AC100V~240V (Built-in)
Power Consumption: <30W
19inch 1U Rack: 445mm x 220mm x 44.5mm
Shipping Weight: 8.0kg (include TX & RX)

• Connectors

Video Connector: 75 Ohm BNC (Gold Center Pin)
IEC169-8 standard
Optical Connector: ST, FC or LC optional
Power Connector: AC line cord

• Environmental

Operating Temperature: -20°C ~+75°C
Storage Temperature: -40°C~+85°C
Relative Humidity: 0%~95% (non-condensing)
MTBF: >100,000 hours