

Fiber Optic Audio Transmission 4-Channel Duplex Analog Audio over Fiber

System Design

Fiber Optic Audio Transmitter & Receiver

VOS-0400DT/R provides for the 4-Channel Duplex 24-Bit Digitally Encoded Analog Audio. Ideal for Broadcast /Studio, CCTV audio and Professional AV applications.


Stand-alone or rack-mount. All units of VOS-0400DT/R come in an insert card version. The cards can be inserted into our 16-slot, 19inch 2U or 4U rack-mountable card cage (VOS-CH02, VOS-CH04).

Features

- Support Point-to-Point or Daisy-Chain connection
- 24-Bit Digitally Encoded Analog Audio over one fiber
- Multi-mode Fiber Support for Distances up to 500m
- Single-Mode Fiber Support for Distances up to 60 km
- LED Status Provide Rapid Indication of Operating Parameters
- No EMI or RFI and no ground loops
- Stand alone or rack-mount
- Produce according to customer's specifications, providing OEM




Panel

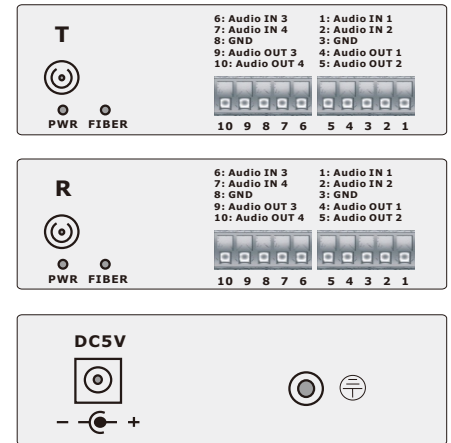


Video
Data
Ethernet

Typical Configuration

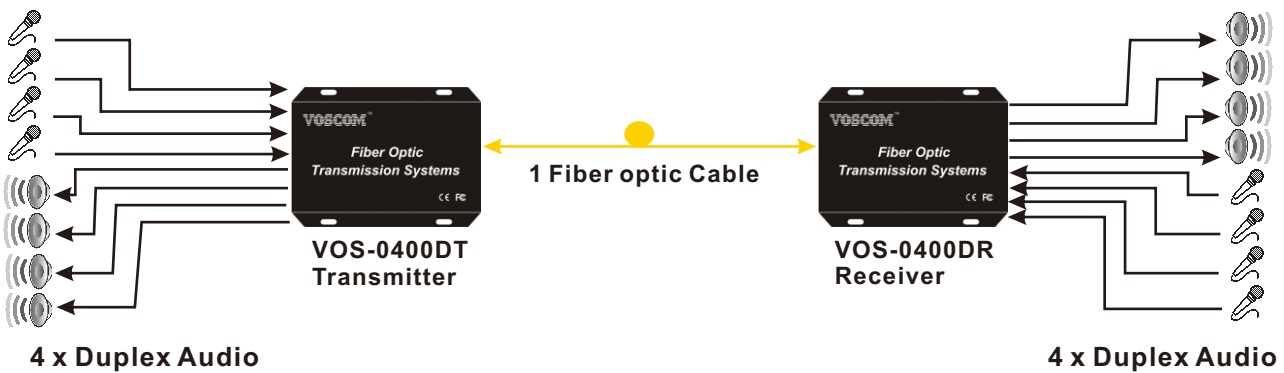

Multiple Audio and Connectors



* If you need other audio connectors, please contact us for the details

Analog Audio over Fiber

Ordering Information

Model Number		Fiber Mode	Wavelengths	Optical Power Budget	Maximum Transmission Distance
Transmitter	Receiver				
VOS-0400DMT	VOS-0400DMR	Multi-Mode	1310/1550nm	16dB	500m
VOS-0400DST	VOS-0400DSR	Single-Mode	1310/1550nm	12dB	20km
VOS-0400DST-4	VOS-0400DSR-4	Single-Mode	1310/1550nm	18dB	40km
VOS-0400DST-6	VOS-0400DSR-6	Single-Mode	1310/1550nm	25dB	60km

Note:

- The Optical Power Budget data fit Multit-mode(62.5/125 μ m),Single-Mode(9/125 μ m).
- When using 50/125 μ m. multimode fiber, subtract 3 dB from the optical power budget.
- Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.
- Maximum transmission distance is also limited by fiber bandwidth.
- Power adapter is manufactured by third party and is supplied with fitted screw-terminal output cables. Power adapter included (for standalone) US, European, UK or Australian power plug.
- Please feel free to consult factory for any special requirement and customization

Specification

<p>• Audio</p> <p>Number of Channels: 4-Channel Duplex Audio Audio input/output Level: +4dBu nominal Audio Type: Unbalanced, Line Level Audio in/output impedance: 600Ω Frequency Response : 20Hz ~ 20KHz Sample Rate : 48KHz, 24K bit rate Signal-to-Noise Ratio(SNR): > 82 dB Distortion: <0.05%</p>	<p>• Connectors</p> <p>Audio: Terminal Block Optical: FC/PC or ST/PC Optional Stand-Alone Power: Screw terminal block Rack Power: AC line cord</p>
	<p>• Electrical & Mechanical</p> <p>Input Power Requirements: DC 5V@1A Power Adapter: AC 100V~240V Power Consumption: < 3W Stand-Alone Dimensions: 104mm x 104mm x 28mm Shipping Weight: 1.0kg (include TX & RX)</p>
	<p>• Environmental</p> <p>Operating Temperature: -45$^{\circ}$C~+75$^{\circ}$C Storage Temperature: -45$^{\circ}$C~+85$^{\circ}$C Relative Humidity: 0%~95% (non-condensing) MTBF: >100,000 hours</p>